

3 dBd LTE omni antenna 790-960MHz, low PIM

DESCRIPTION

The 4240 Series colinear antennas are designed for LTE/GSM applications where a durable and high performance antenna is required. The centre fed dipole design and feed network gives a stable radiation pattern across a wide bandwidth, and allows tilted beam designs to be effectively employed without large pattern distortions. High quality materials and manufacturing techniques are employed to ensure that the antenna has excellent intermodulation performance & wide bandwidth characteristics for multi-channel trunked radio communication systems. The antenna has been designed to withstand lightning strike.

SPECIFICATIONS

Electrical	
Frequency	790 - 960 MHz
Max. Input Power	350 W
Omni Deviation	< ± 1 dB
Polarisation	Vertical
Peak Instantaneous Power (PIP)	25 kW
3 dB Beamwidth, E-Plane	32° ±1°
3 dB Beamwidth, H-Plane	Omnidirectional
Impedance	50 Ω
Gain	3 dBd (5.2 dBi)
VSWR	< 1.5:1
Passive Intermodulation	-153dBc (3rd Order, 2 x Tx @ 43dBm)
Lightning Protection	Lightning current handling capability: 200 kA According to EN 62305-1 (Test pulse 10/350 μs)
Antistatic Protection	All metal parts DC-grounded (Connector shows a DC-short)

Mechanical		
Connection(s)	7/16 DIN(f)	
Materials	Antenna Base: Aluminium Shroud: GRP tube 53mm dia.	
Mounting Section	Al. tube 63.5 mm dia. x 350 mm long	
Dimensions	1124 (l) x 53 (dia.) mm	
Wind Load	89 N (160km/h)	
Weight	5.5 kg / 12.13 lb	
Mounting Bracket	2141.01.00.00 (up to ø120mm) (Ordered Separately)	ETC-250 (ø50 to ø76mm) (Ordered Separately)

Environmental	
Survival Wind Speed	300 km/h
Ingress Protection	IP56


ORDERING

Model	Product No.	Description	Frequency
3 dBd LTE omni antenna 790-960MHz, low PIM	4240.03-875-T0	0° Electrical Tilt	790 - 960 MHz
3 dBd LTE omni antenna 790-960MHz, low PIM	4240.03-875-T3	3° Electrical Tilt	790 - 960 MHz
3 dBd LTE omni antenna 790-960MHz, low PIM	4240.03-875-T6	6° Electrical Tilt	790 - 960 MHz
Galvanised steel parallel bracket 38-120mm (PAIR)	2141.01.00.00		
Extruded Parallel Tube Clamp, 50 - 76mm	ETC-250		




DIAGRAM

RADIATION PATTERNS

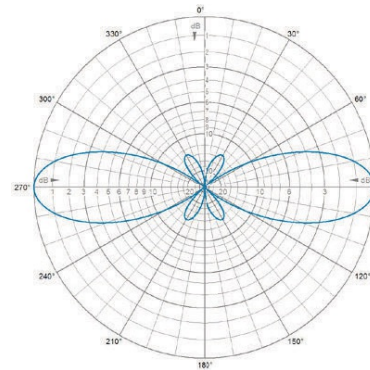

E-Plane | 875 MHz

RADIATION PATTERNS

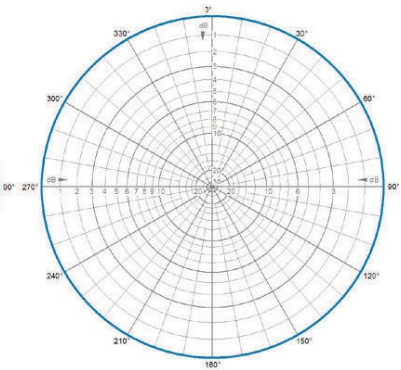

H-Plane | 875 MHz

