



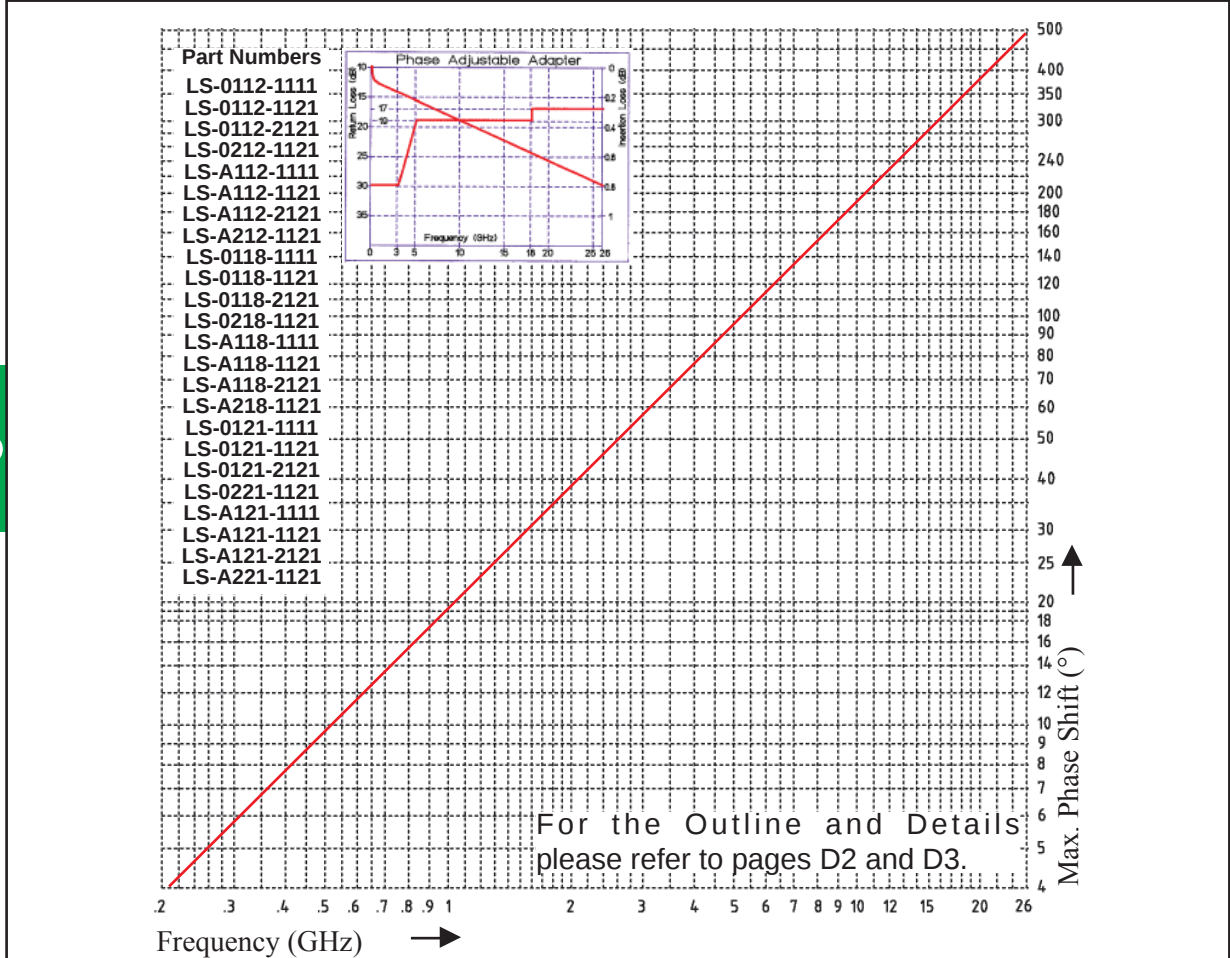


Two different Mounting Brackets are offered. They can easily be added to any Precision Phase Adjuster. Using these standard attachments makes it easy to mount the Phase Shifter in the system or to the test setup and ensures proper operation.

mounting at both sides

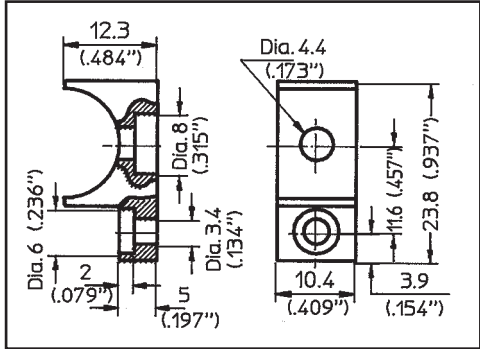

Bracket, Part No.: MB-0200-07
Material: Aluminum iridited


mounting at only one side

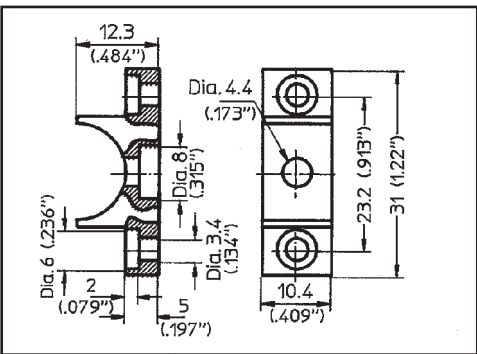

Bracket, Part No.: MB-0100-07
Material: Aluminum iridited

- Precision phase adjustable miniature adapters, DC to 26.0 GHz.
- Impedance of 50 Ohms is maintained over the full adjustment range.
- Positive resettable locking mechanism.
- Smooth continuous phase adjustment.
- Physical length change of the unit equals the electrical length change.
- Rugged construction, housing and outer conductors are made from stainless steel.

- Captivated center contacts.
- Spring fingers and center contacts are made from beryllium copper, heat treated and gold plated per ASTM-B-488; Type III, Code C
- SMA connector interface specification per MIL-STD-348A.
- Operating temperature range: -54°C to +115°C, units with extended temperature range are available on request.
- Physical length change per revolution of adjustment nut: ~ 0.30 mm
- Electrical length change per revolution of adjustment nut: ~ 0.30 mm
- Maximum change in physical length 4.06 +/- 0.25 mm of air

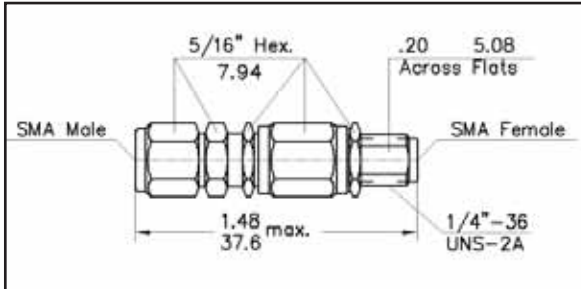

The difference between the adapters is:
The **LS-0170-1121** can be taken apart completely after the max. position and is only available in SMAm/SMAf.
The **LS-0070-XXYY** cannot be taken apart and is available in SMAM / SMAM; SMAM / SMAf; and SAMf / SMAf.

Part Number	Frequency Range	VSWR max.	Insertion Loss max.	Phase Shift min.	No. of Turns	Nom. Phase Shift Deg./GHz/Turn	Time Delay (psec.) min. max.	Weight max.
LS-0070-XXYY LS-0170-1121	DC-26.0 GHz	1.06+.009*f(GHz)	0.26 dB	127° at 26.0 GHz	13.5	0.36	109.2 122.8	9 g

