


PRODUCT DATA SHEET

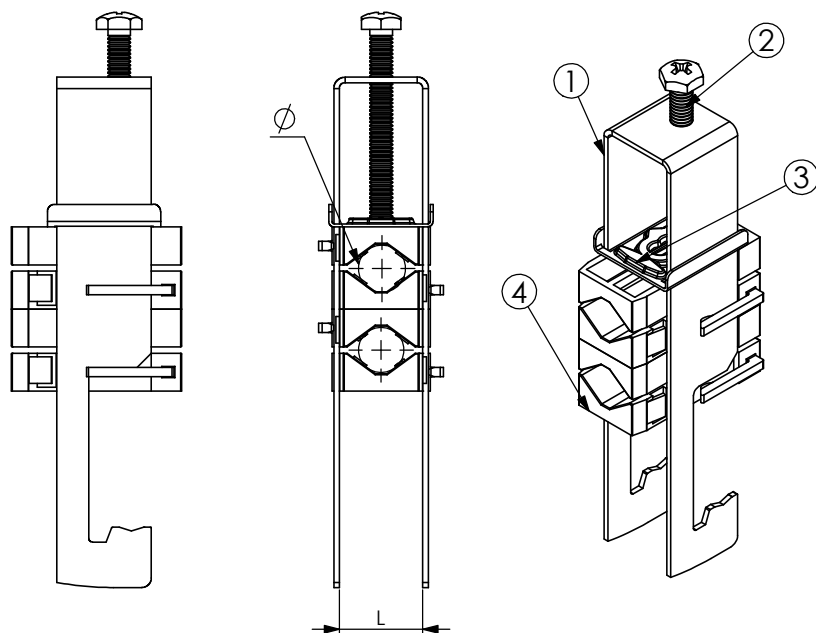

A) SPECIFICATIONS

- 1 Stainless steel bow
Hooking on 30x30mm angular
- 2 Self-locking pressure screw M6
- 3 Stainless steel sliding pressure plate.
- 4 SEP black P.A. fiberglass saddles

B) RESISTANCE TESTS

UV Test BS-ISO 105-B06
Vibration test conforming to UNI 60068-2-6
Operating temperature: -30°C +120°C

C) PACKAGING INFORMATION

Packing in boxes.
Label indicating:
product code, article, quantity,
production batch,
FIMO logo and figure.
(Customer code on request).

D) MOUNTING INSTRUCTIONS

IST026

CODE	ARTICLE	N° CABLES	L	ø CABLES	BOX	WEIGHT
60 1512 0814	OX A3 / 2 x 12	2	12	6 - 12	100	55
60 1512 0816	OX A3 / 2 x 22	2	22	12 - 22	100	97
60 1512 0818	OX A3 / 2 x 34	2	34	22 - 34	100	163

RI	DATE	DR	DATE	AP	Description: Stainless cable clamps type OX A3 For 2 coaxial cables, complete with 4 saddles. For articles see schedule.
02					
01					
00	31/08/16	G.S.	31/08/16	A.V.	
	1 ST EMISSION				
 Setting Installation Standards					Use: Fastening of 2 coaxial cables. Hooking on 30x30mm angular

FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress
Copyright FI.MO.TEC. S.p.a. All rights reserved.