


PRODUCT DATA SHEET

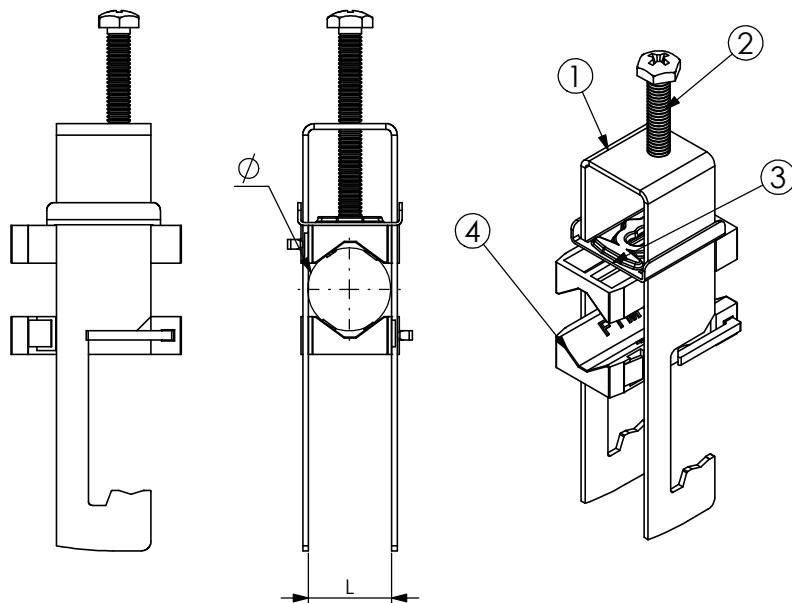

A) SPECIFICATIONS

- 1 Stainless steel bow
Hooking on 50x50mm angular
- 2 Self-locking pressure screw M6
- 3 Stainless steel sliding pressure plate.
- 4 SEP black P.A. fiberglass saddles

B) RESISTANCE TESTS

UV Test BS-ISO 105-B06
Vibration test conforming to UNI 60068-2-6
Operating temperature: -30°C +120°C

C) PACKAGING INFORMATION

Packing in boxes.
Label indicating:
product code, article, quantity,
production batch,
FIMO logo and figure.
(Customer code on request).

D) MOUNTING INSTRUCTIONS

IST026

CODE	ARTICLE	N° CABLES	L	ø CABLES	BOX	WEIGHT
60 1517 0801	OX A5 / 1 x 12	1	12	6 - 12	100	61
60 1517 0803	OX A5 / 1 x 22	1	22	12 - 22	100	77
60 1517 0805	OX A5 / 1 x 34	1	34	22 - 34	100	121
60 1517 0807	OX A5 / 1 x 46	1	46	34 - 46	50	147
60 1517 0809	OX A5 / 1 x 58	1	58	46 - 58	50	175
60 1517 0811	OX A5 / 1 x 70	1	70	58 - 70	50	189

RI	DATE	DR	DATE	AP	Description:
02					Stainless cable clamps type OX A5 For 1 coaxial cable, complete with 2 saddles. For articles see schedule.
01					
00	31/08/16	G.S.	31/08/16	A.V.	
1 ST EMISSION					
 Setting Installation Standards					Use: Fastening of 1 coaxial cable. Hooking on 50x50mm angular

FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress
Copyright FI.MO.TEC. S.p.a. All rights reserved.