


# PRODUCT DATA SHEET

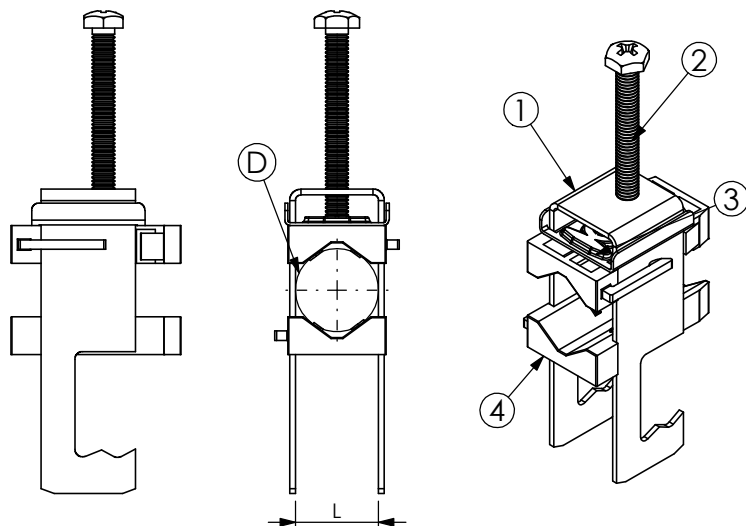

## A) SPECIFICATIONS

- 1 Stainless steel bow  
Hooking on  $\varnothing$  8-25 round and 3-25mm flat
- 2 Self-locking pressure screw M6
- 3 Stainless steel sliding pressure plate.
- 4 SEP black P.A. fiberglass saddles

## B) RESISTANCE TESTS

UV Test BS-ISO 105-B06  
Vibration test conforming to UNI 60068-2-6  
Operating temperature: -30°C +120°C



## C) PACKAGING INFORMATION

Packing in boxes.  
Label indicating:  
product code, article, quantity,  
production batch,  
FIMO logo and figure.  
( Customer code on request ).

## D) MOUNTING INSTRUCTIONS

IST026

CODE	ARTICLE	N° CABLES	L	Ø CABLES	BOX	WEIGHT
60 1516 1081	OX M / 1 x 12	1	12	6 - 12	100	50
60 1516 1083	OX M / 1 x 22	1	22	12 - 22	100	68
60 1516 1085	OX M / 1 x 34	1	34	22 - 34	100	106
60 1516 1087	OX M / 1 x 46	1	46	34 - 46	50	136
60 1516 1089	OX M / 1 x 58	1	58	46 - 58	50	160
60 1516 1091	OX M / 1 x 70	1	70	58 - 70	50	180

RI	DATE	DR	DATE	AP	Description:
02					Stainless cable clamps type OX M For 1 coaxial cable, complete with 2 saddles. For articles see schedule.
01					
00	29/01/16	G.S.	29/01/16	A.V.	
1 <sup>ST</sup> EMISSION					
					Use:  Fastening of 1 coaxial cable. Hooking on Ø 8-25 round and 3-25mm flat

FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress  
Copyright FI.MO.TEC. S.p.a. All rights reserved.