


PRODUCT DATA SHEET

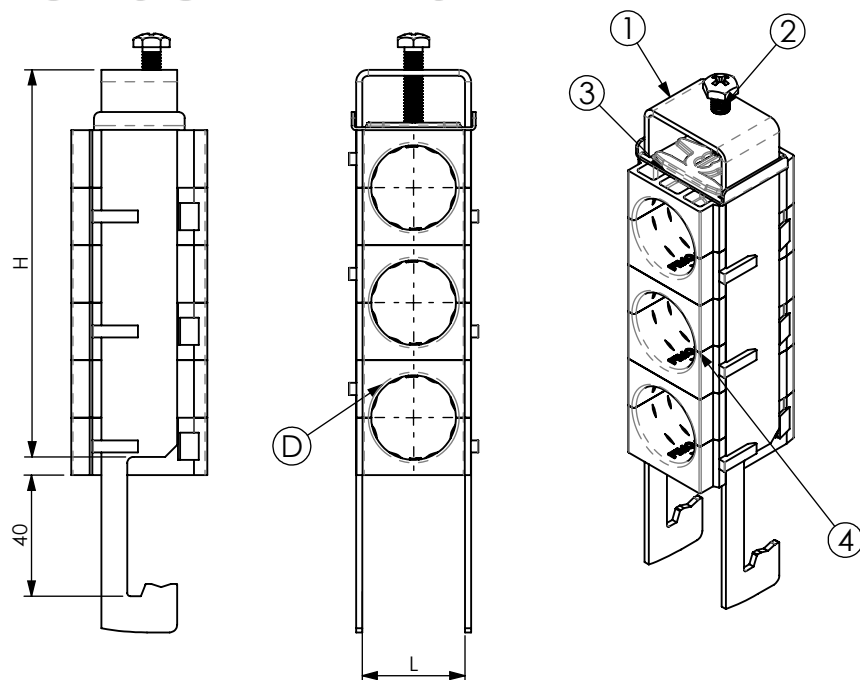

A) SPECIFICATIONS

- 1 Stainless steel bow
Hooking on on L shaped
angular support 40x40mm
- 2 Self-locking pressure screw M6
- 3 Stainless steel sliding pressure plate.
- 4 SAS black P.A. fiberglass saddles

B) RESISTANCE TESTS

UV Test BS-ISO 105-B06
Vibration test conforming to UNI 60068-2-6
Operating temperature: -30°C +120°C



C) PACKAGING INFORMATION

Packing in boxes.
Label indicating:
product code, article, quantity,
production batch,
FIMO logo and figure.
(Customer code on request).

D) MOUNTING INSTRUCTIONS

IST026

CODE	ARTICLE	ø D	L	l	H	h	BOX	WEIGHT
61 1551 0306	sRF A4/ 3x6	5 - 6	12	17	49	81	50	75
61 1551 0307	sRF A4/ 3x7	6 - 7	12	17	49	81	50	75
61 1551 0308	sRF A4/ 3x8	7 - 8	12	17	49	81	50	75
61 1551 0309	sRF A4/ 3x9	8 - 9	12	17	49	81	50	75
61 1551 0391	sRF A4/ 3x9 M	9 - 10	12	17	49	81	50	75
61 1551 0310	sRF A4/ 3x10	10 - 11	12	17	49	81	50	75
61 1551 0311	sRF A4/ 3x11	10 - 11	22	28	91	117	50	137
61 1551 3012	sRF A4/ 3x12	11 - 12	22	28	91	117	50	137
61 1551 0313	sRF A4/ 3x13	12 - 13	22	28	91	117	50	130
61 1551 0314	sRF A4/ 3x1/2"S (14)	13 - 14	22	28	91	117	50	140
61 1551 0338	sRF A4/ 3x3/8" (16)	15 - 16	22	28	91	117	50	131
61 1551 0312	sRF A4/ 3x1/2" (17)	16 - 17	22	28	91	117	50	130
61 1551 0358	sRF A4/ 3x5/8" (23)	21 - 23	34	41	128	150	50	276
61 1551 0327	sRF A4/ 3x7/8"S (27)	26 - 27	34	41	128	150	50	231
61 1551 0378	sRF A4/ 3x7/8" (28)	27 - 28	34	41	128	150	50	231
61 1551 3178	sRF A4/ 3x7/8"M (30)	29 - 30	34	41	128	150	50	219
61 1551 3118	sRF A4/ 3x1.1/8" (38)	36 - 38	46	53	165	194	50	363
61 1551 3114	sRF A4/ 3x1.1/4" (40)	39 - 40	46	53	165	194	50	345
61 1551 3148	sRF A4/ 3x1.5/8"S (49)	48 - 49	58	65	202	233	25	490
61 1551 3158	sRF A4/ 3x1.5/8" (52)	50 - 52	58	65	202	233	25	487

RI	DATE	DR	DATE	AP	<i>Description:</i> <i>Stainless cable clamps type sRF A4 For 3 coaxial cables, complete with 6 calibrated saddles. For articles see schedule.</i>
02					
01					
00	01/02/16	G.S.	01/02/16	A.V.	
1 ST EMISSION					
					<i>Use:</i> <i>Fastening of 3 coaxial cables to angular 40 x 40 mm.</i>