


# PRODUCT DATA SHEET

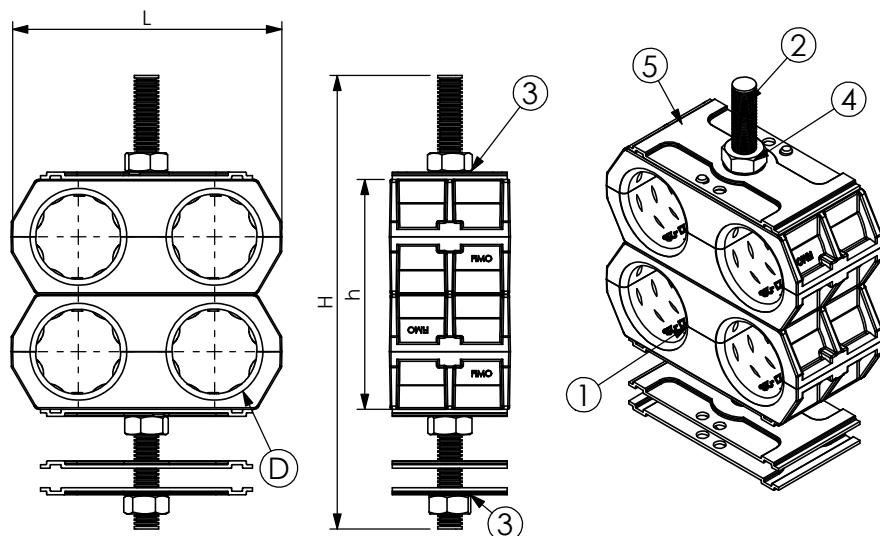

## A) SPECIFICATIONS

- 1 H.D.P.E. SAB duoble saddle
- 2 Stainless steel threaded bar BFI M8
- 3 Stainless steel elastic washer REI 8
- 4 Stainless steel hexagonal nut DAI 8
- 5 Stainless steel pressure plate PRUC

## B) RESISTANCE TESTS

UV Test BS-ISO 105-B06  
Vibration test conforming to UNI 60068-2-6  
Operating temperature: -50°C +80°C



## C) PACKAGING INFORMATION

Packing in boxes.  
Label indicating:  
product code, article, quantity,  
production batch,  
FIMO logo and figure.  
( Customer code on request ).

## D) MOUNTING INSTRUCTIONS

On request

CODE	ARTICLE	ø D	L	h	H	BOX	WEIGHT
61 1575 0409	UCL/ 4x9	8 - 9	56	100	42	20	195
61 1575 0411	UCL/ 4x11	10 - 11	56	100	42	20	195
61 1575 0413	UCL/ 4x13	12 - 13	56	125	54	20	218
61 1575 0414	UCL/ 4x1/2"S (14)	13 - 14	68	125	54	20	218
61 1575 0438	UCL/ 4x3/8" (16)	15 - 16	68	125	54	20	218
61 1575 0412	UCL/ 4x1/2" (17)	16 - 17	68	125	54	20	218
61 1575 0458	UCL/ 4x5/8" (23)	21 - 23	90	150	76	20	320
61 1575 0478	UCL/ 4x7/8" (28)	27 - 28	90	150	76	20	390
61 1575 4118	UCL/ 4x1.1/8" (38)	36 - 38	114	200	108	20	390
61 1575 4114	UCL/ 4x1.1/4" (40)	39 - 40	114	200	108	20	512
61 1575 4148	UCL/ 4x1.5/8"S (49)	48 - 49	137	250	132	20	239
61 1575 4158	UCL/ 4x1.5/8" (52)	50 - 52	137	250	132	20	235

RI	DATE	DR	DATE	AP	Description:
02					Cable Clamps type UCO+2 PUC 70
01					
00	06/10/15	G.S.	06/10/15	A.V.	
1 <sup>ST</sup> EMISSION					
 Setting Installation Standards					Use:  Fixing of 4 cables on steel wire-mesh cable trays