


# PRODUCT DATA SHEET

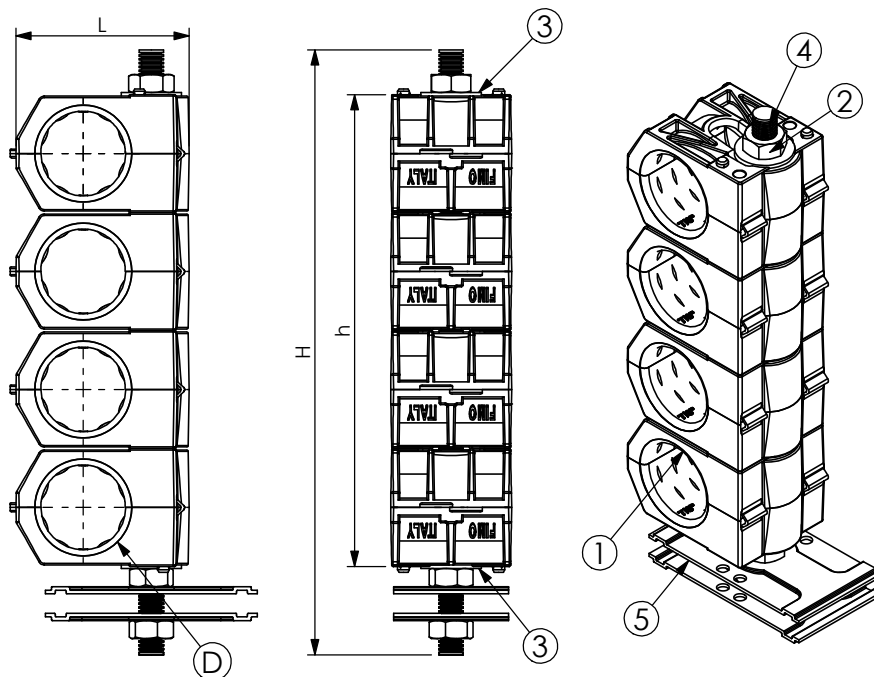

## A) SPECIFICATIONS

- 1 P.P. SAM hinged single saddle
- 2 Stainless steel threaded bar BFI M8
- 3 Stainless steel elastic washer RPI 10/20
- 4 Stainless steel hexagonal nut DAI 8
- 5 Stainless steel pressure plate PRUC

## B) RESISTANCE TESTS

UV Test BS-ISO 105-B06  
Vibration test conforming to UNI 60068-2-6  
Operating temperature: -50°C +80°C



## C) PACKAGING INFORMATION

Packing in boxes.  
Label indicating:  
product code, article, quantity,  
production batch,  
FIMO logo and figure.  
( Customer code on request ).

## D) MOUNTING INSTRUCTIONS

On request

CODE	ARTICLE	ø D	L	h	H	BOX	WEIGHT
61 1578 0411	USL/ 4x11	10 - 11	44	125	84	20	140
61 1578 0414	USL/ 4x1/2" S (14)	13 - 14	50	150	108	20	212
61 1578 0412	USL/ 4x1/2" (17)	16 - 17	50	150	108	20	212
61 1578 0478	USL/ 4x7/8" (28)	27 - 28	59	200	152	20	240
61 1578 4114	USL/ 4x1.1/4" (40)	39 - 40	70	300	216	20	285
61 1578 4158	USL/ 4x1.5/8" (52)	50 - 52	80	400	264	20	356

RI	DATE	DR	DATE	AP	Description:
02					Cable Clamps type USO+2 PUC 70
01					
00	06/10/15	G.S.	06/10/15	A.V.	
1 <sup>ST</sup> EMISSION					
					Use:  Fixing of 4 cables on steel wire-mesh cable trays

FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress  
Copyright FI.MO.TEC. S.p.a. All rights reserved.