


Specifications

1	Pass Band Frequency	DC-3420&3900-8500MHz
2	Stop Band Frequency	3600-3800MHz
3	Pass Band Insertion Loss	$\leq 2.5\text{dB}$
4	Return Loss	$\geq 10\text{dB}@DC-3420\&3900-5500\text{MHz}$ $\geq 8\text{dB}@5500-8500\text{MHz}$
5	Stop Band Attenuation	$\geq 55\text{dB @ } 3600-3800\text{MHz}$
6	Impedance	50 ohms
7	Power	$\leq 20\text{W}$
8	Connectors	SMA-Female
9	Surface Finish	Black Paint
10	Temperature Range	$0^{\circ}\text{C} \sim +55^{\circ}\text{C}$

Dimensions (Unit: mm)

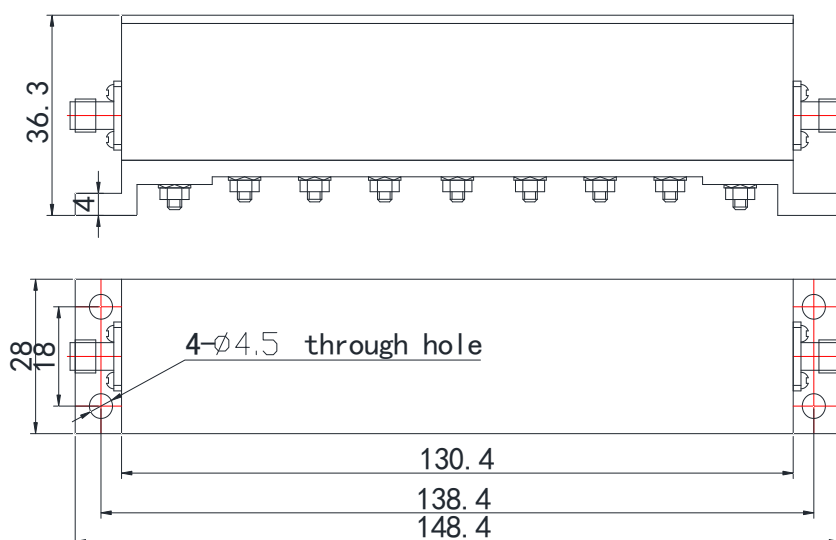

Typical test data

