

Band-Pass/Band-Reject Filters for the 150 MHz Band

DESCRIPTION

- High power base station band-pass/band-reject filters for the 140 – 175 MHz range.
- The use of large $\varnothing 200$ mm cavities means a high Q, resulting in a very narrow pass/reject spacing.
- The large dimensions also mean a high power rating.
- Unloaded Q of a single cavity is approx. 7000.
- High frequency stability on temperature and power.
- 19" mounting brackets are available as an option.



SPECIFICATIONS

Electrical			
Model	BPBR 2/1-200	BPBR 2/2-200	BPBR 2/3-200
Frequency	140 - 175 MHz		
Max. Input Power	300 W @ 0.5 dB IL 125 W @ 2.0 dB IL	300 W @ 1.0 dB IL 125 W @ 4.0 dB IL	300 W @ 1.5 dB IL 125 W @ 6.0 dB IL
Insertion Loss	Adjustable 0.3 - 2.0 dB	Adjustable 0.6 - 4.0 dB	Adjustable 0.9 - 6.0 dB
Impedance	50 Ω		
Attenuation	See figure 1	See figure 2	See figure 3
VSWR	< 1.5:1		
Mechanical			
Connection(s)	N(f)		
Dimensions	$\varnothing 200$ x 600 mm / $\varnothing 7.87$ x 23.62 in.	L:200 x W:400 x H:600 mm / 7.87 x 15.74 x 23.62 in.	L:200 x W:600 x H:600 mm / 7.87 x 23.62 x 23.62 in.
Weight	Approx. 3.8 kg / 8.38 lb.	Approx. 8 kg / 17.64 lb.	Approx. 12.4 kg / 27.34 lb.
Environmental			
Operating Temperature Range	30 to 60 °C		
Frequency Stability	1.5 ppm/° C (approx.)		

ORDERING

Model	Product No.
BPBR 2/1-200	200001084
BPBR 2/2-200	200001082
BPBR 2/3-200	200001755
BRBP 2/1-200	200001435
BRBP 2/2-200	200001441
BRBP 2/3-200	200001756

MOUNTING NOTE

Other cavity mounting options available:
[//amphenolprocom.com/images/PDF/Cavity_Mounting_Options.pdf](http://amphenolprocom.com/images/PDF/Cavity_Mounting_Options.pdf)

TYPICAL RESPONSE CURVES

FIGURE 1

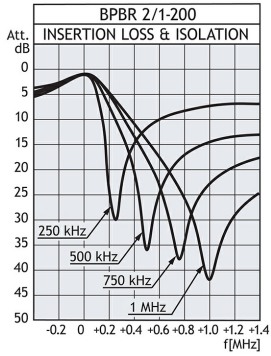


FIGURE 2

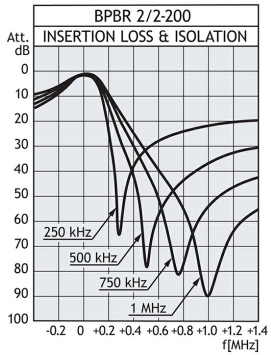


FIGURE 3

