


RF TERMINATION Type 6530.41.0001

Description

Low PIM Termination, Medium Power

PIM optimised

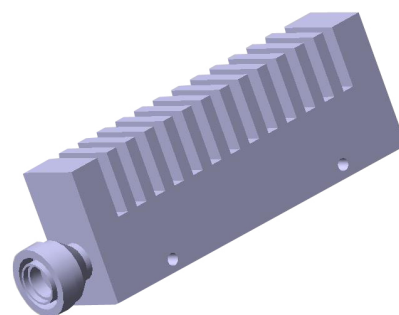

Product Configuration

Connector	7/16 jack (female)
Interface standards	IEC 60169-4_CECC 22190_DIN 47223_VG 95250

Technical Data

Electrical Data

Nominal Impedance	50 Ω
Frequency range	0.698 to 2.7 GHz
Power rating	30 Watt average power up to 55 °C ambient temperature, linearly derated to Watt at °C ambient temperature. 5000 Watt peak power
3rd order intermodulation max.	Static -160 dBc at 2x 43 dBm / 2x 20 W carrier

Mechanical Data

Weight	0.66 kg
Coupling nut torque	30 Nm

Environmental Data

Operating temperature	-35 °C to 55 °C
2011/65/EU (RoHS - including 2015/863 and 2017/2102)	compliant

Material Data

Piece Part	Material	Surface Plating
Centre contact	Bronze	Tri-metal Plating
Outer contact	Brass	Tri-metal Plating
Body	Aluminium	Black
Insulator	PFA / PTFE	

Related Documents

Outline drawing	DOU-00289420
-----------------	--------------

Ordering Information

Single Packaging	6530.41.0001
Packaging	

Additional Information

Remarks

PIM: typ. < -165 dBc
VSWR: typ. 1.10 : 1
Surface temperatur: +75 °C max. at 25 °C ambient temperatur
Mounting brackets included

RF TERMINATION

Type 6530.41.0001