

Coaxial RF Termination

RFT2702SSMP1

DC-26.5 GHz, SSMP Female, 2 Watts



Rev 1

Electrical

Impedance	50 ohm
Frequency Range	DC-26.5 GHz
VSWR	1.35 max
Input Avg Power	2W@ 25°C ambient, derating linearly to 0.2W at 100°C
Peak Power	50W (5 micro-sec pulse width, 0.5% duty cycle)


Mechanical

Connector Body	Gold plated beryllium copper
Center Contact	Gold plated beryllium copper
Weight	2g

Environmental

Operating Temp	-55°C to 100°C
Storage Temp	-55°C to 125°C
RoHS	Compliant

Dimensions(mm)

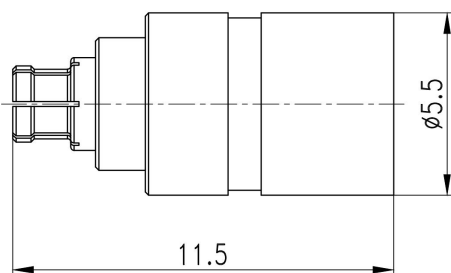

Notes

1. Customized outlines and optimal VSWR available.