Data Sheet

FLC-Z/K-A607_100-P

Description

LC connector, SM, APC, green

Features

- Push-pull mechanism for best handling and high packing density
- One-piece design for easy termination
- Short rigid length
- Switchable duplex connectors

Technical Data

General Data

Characteristics	Values
Specified acc. to	IEC 61754-20, TIA 604-10-A
Connector family	LC
Connector type	SM
Polishing	APC
Weight in kg	0.001
Material	Plastic
Color of housing	Green

Mechanical Data

Characteristics	Values
Operating temperature min. (°C)	-45
Operating temperature max. (°C)	85
Min. mating cycles	1000
Tensile load (N)	100

Optical Data

Characteristics	APC
IL 97% (dB)	0.25
IL typ. (dB)	0.12
RL (dB)	>85

Enviroment Data

Characteristics	Values
Free of halogen	Yes
RoHS compliant	Yes
REACH compliant	Yes
UV resistant	Yes
Flammability rating	UL 94 V-0

Technical drawing

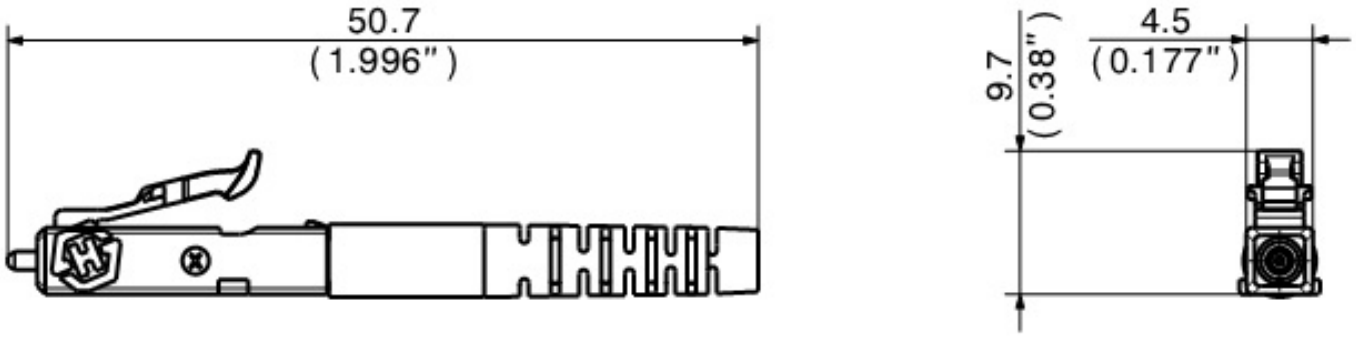

Ordering information

Description	Item number
FLC-Z/K-A607_100-P	84091833

Waiver: Fact and figures herein are for information only and do not represent any warranty of any kind.