

Description

E-2000™ (LSH) connector, G50/125, G62.5/125, PC, beige

Features

- Automatic metal shutter in connector for dust protection and laser safety
- One-piece design for easy termination
- Colour coding of connector
- Mechanical coding of connector
- Ideal for HighPower applications
- Switchable duplex clips



Technical Data

General Data

Characteristics	Values
Specified acc. to	IEC 61754-15, TIA 604-16
Connector family	LSH
Connector type	G50/125, G62.5/125
Polishing	PC
Weight in kg	0.0029
Material	Plastic
Color of housing	Beige

Mechanical Data

Characteristics	Values
Operating temperature min. (°C)	-40
Operating temperature max. (°C)	85
Min. mating cycles	1000
Tensile load (N)	100


Optical Data

Characteristics	PC
IL 97% (dB)	0.5
IL typ. (dB)	0.2
RL (dB)	>35

Environment Data

Characteristics	Values
Free of halogen	Yes
RoHS compliant	Yes
REACH compliant	Yes
UV resistant	Yes
Flammability rating	UL 94 V-0

Technical drawing

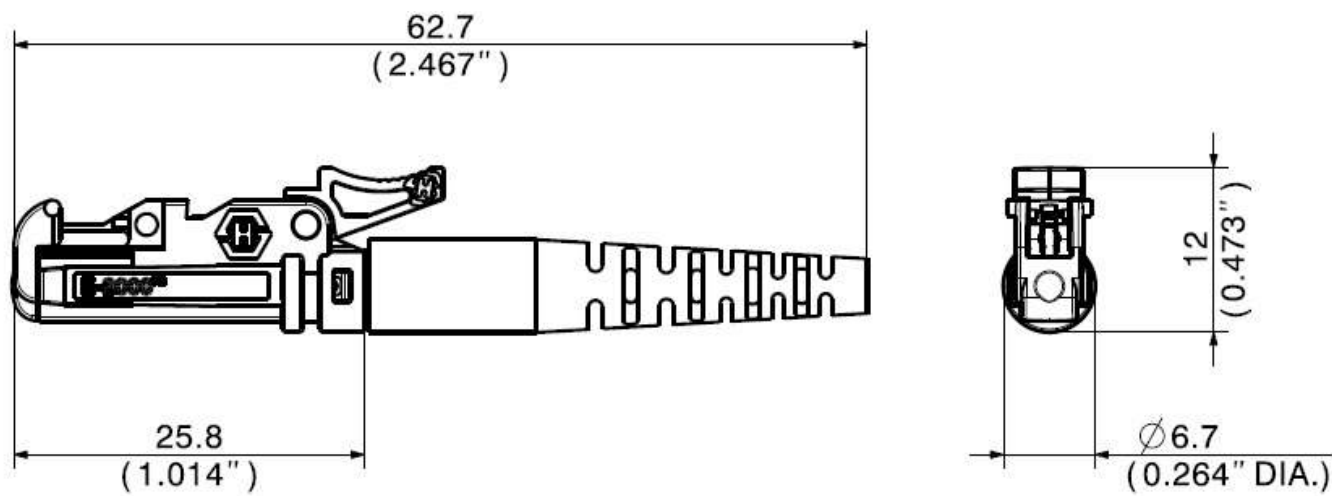

Ordering information

Description	Item number
-------------	-------------