


FSC-CMAX-A600_100-P

Description

SC connector, SM, High-end, APC 8°, APC 9°, green

Features

- Push-pull connector
- For APC 8° & APC 9°
- One-piece design for easy and quick termination
- High mechanical and thermal resistance according to Telcordia GR-326-CORE and IEC 61753-1 (Cat.U)

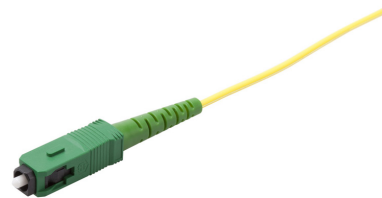

Technical Data

General Data

Characteristics	Values
Specified acc. to	IEC 61754-4, TIA 604-3
Connector family	SC
Connector type	SM High-end
Polishing	APC
Weight in kg	0.0028
Material	Plastic
Color of housing	Green

Mechanical Data

Characteristics	Values
Operating temperature min. (°C)	-40
Operating temperature max. (°C)	85
Min. mating cycles	1000
Tensile load (N)	100

Optical Data


Characteristics	APC
IL 97% (dB)	0.25
IL typ. (dB)	0.12
RL (dB)	>85

Environment Data

Characteristics	Values
Free of halogen	Yes
RoHS compliant	Yes
REACH compliant	Yes
UV resistant	Yes
Flammability rating	UL 94 V-0

FSC-CMAX-A600_100-P

Technical drawing

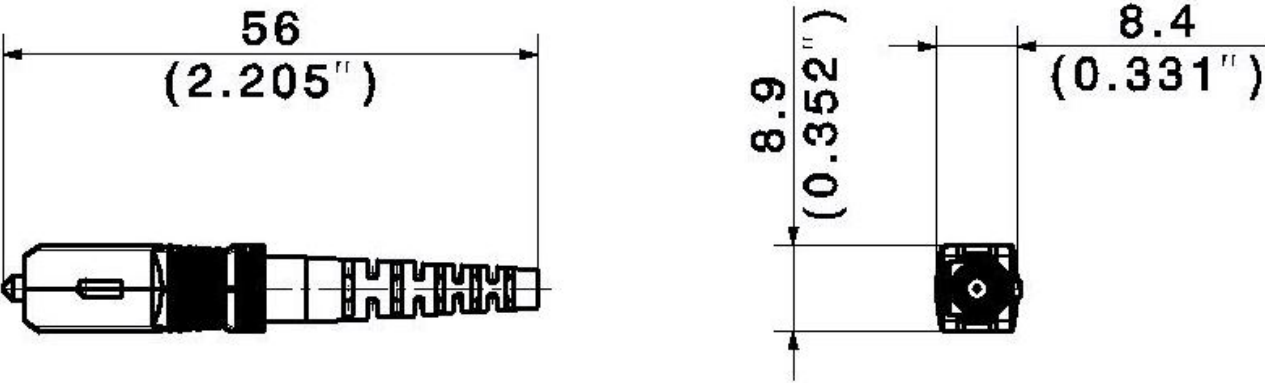

Ordering information

Description	Item number
FSC-CMAX-A600_100-P	22650950