

## Summary

[Request a quote](#)[Catalog](#)

Coax	1
Locking system	Push-pull
Jacket cable outside diameter [mm]	0.00 - 0.00 mm
Series	00 - NIM-CAMAC

## Technical details

### Electrical Configuration

Coax	1
Insert configuration value	0.25 - 1 Coax (50 Ohm)
Insulator	T: PTFE
Rated current	4 Amps
Contact Type	Coaxial 50 Ohm
Test voltage	1.1 kV (rms)

[https://www.lemo.com/int\\_en/solutions/specialties/00-nim-camac/ftl-00-250-ntf.html](https://www.lemo.com/int_en/solutions/specialties/00-nim-camac/ftl-00-250-ntf.html)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

## Form & Material

Shell style / Model id	FTL - T-plug with two receptacles (90 degree)
Housing material	Brass (nickel plated [SAE AMS QQ N 290]) shell, collet nut, latch sleeve and mid pieces
Locking system	Push-pull
Keying	Circular (can rotate)
Weight	7.13 g


## Environment

Environmental protection	IP50
Minimal temperature	-55°C / +260°C
F ret (min)	100 N
Salt Spray Corrosion	>144 hr

## Cable fixation

Cable termination protection	Standard back nut (no additional protection)
Fixation type	Cable collet

## Drawings

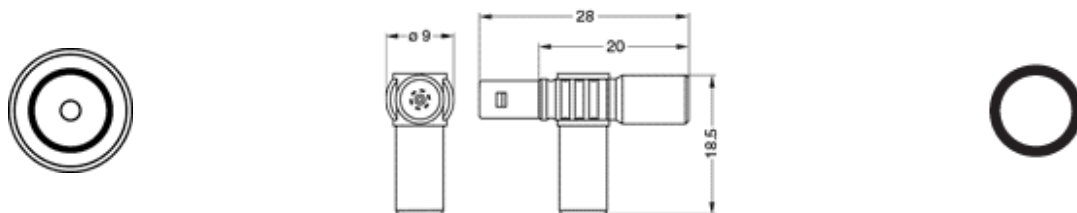

## Dimensions

	L	A
mm.	28	9
in.	1.1	0.35

[https://www.lemo.com/int\\_en/solutions/specialties/00-nim-camac/ftl-00-250-ntf.html](https://www.lemo.com/int_en/solutions/specialties/00-nim-camac/ftl-00-250-ntf.html)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

# Recommended By Lemo

Accessories
Tools

[https://www.lemo.com/int\\_en/solutions/specialties/00-nim-camac/ftl-00-250-ntf.html](https://www.lemo.com/int_en/solutions/specialties/00-nim-camac/ftl-00-250-ntf.html)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.