
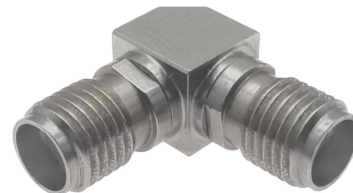


Drawing(mm)

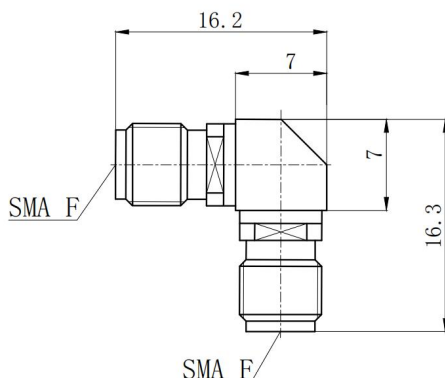

Electrical & Environmental

Impedance	50 ohm
Frequency Range	18 GHz
VSWR	1.3 max
Operating Temp	-55℃ to +165℃
Interface	SMA per MIL-STD-348

Material

Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper
Insulator	PTFE

Typical Test Data

