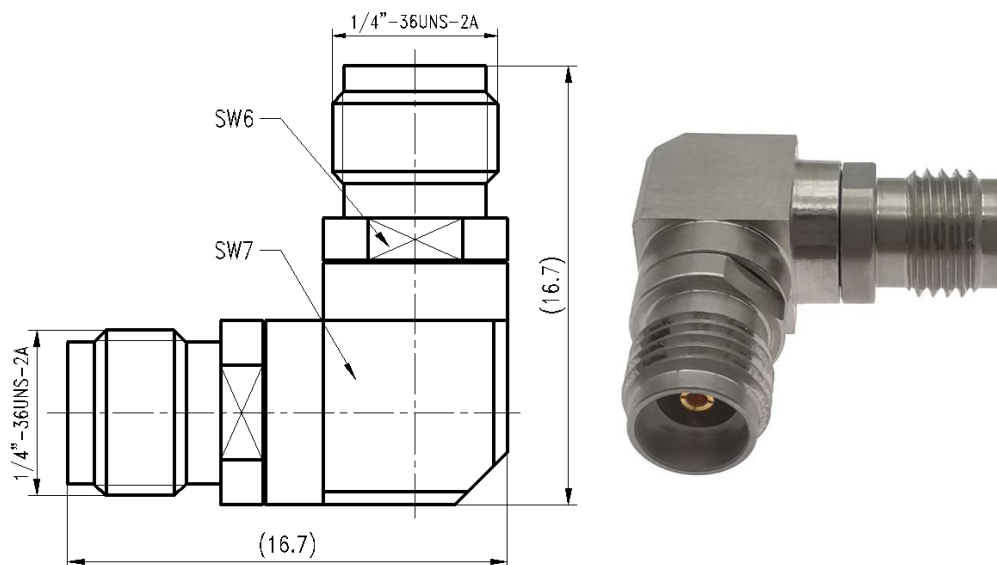


**Drawing(mm)**

**Electrical & Environmental**

Impedance	50 ohm
Frequency Range	40 GHz
VSWR	1.25 max
Operating Temp	-55°C to +165°C
Interface	2.92mm per MIL-STD-348B

**Material**

Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper
Insulator	PEI

**Typical Test Data**
