


### Drawing(mm)

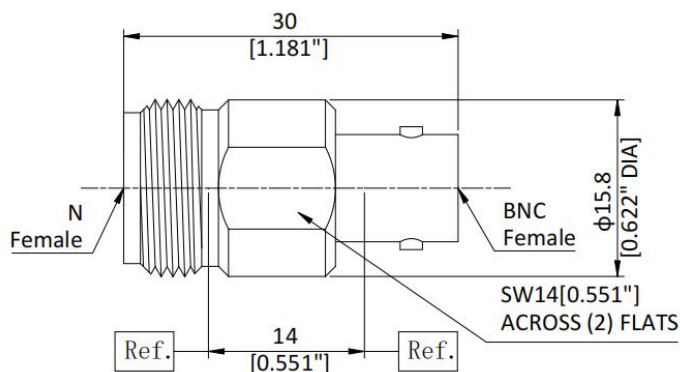

### Electrical & Environmental

Impedance	50 ohm
Frequency Range	DC-4 GHz
VSWR	1.15 max
Operating Temp	-55°C to +165°C
Interface	Per MIL-STD-348

### Material

Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper/brass
Insulator	PTFE

### Typical Test Data

