


Short Low Power Terminations Series 170

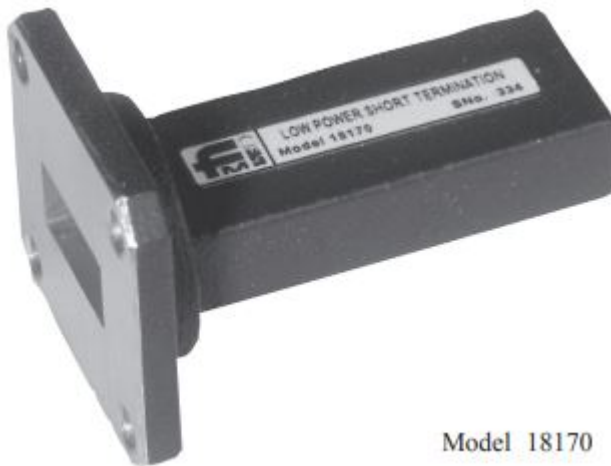

Model 18170

Features

- Low VSWR
- Ideal for Systems Use
- Robust

Flann series 170, short, low power terminations provide a maximum VSWR of 1.10 : 1 within a minimal overall length. They are particularly suitable where space is at a premium.

Higher frequency models are also available.

Please contact our Sales Office for details.

Model	Frequency Range (GHz)	Waveguide WG R WR	Max Mean cw power (Watts)	VSWR (better than)	Dimension A (mm)	Weight (kg)
-------	-----------------------	----------------------	---------------------------	-----------------------	------------------	----------------

10170	2.60 - 3.95	10	32	284	5	1.1	200	2.1
11A170	3.22 - 4.90	11A	40	229	4	1.1	170	1.1
12170	3.94 - 5.99	12	48	187	2	1.1	140	0.9
13170	4.64 - 7.0	13	58	159	1.5	1.1	125	0.75
14170	5.38 - 8.18	14	70	137	1	1.1	105	0.6
15170	6.58 - 10.0	15	84	112	1	1.1	80	0.25
16170	8.20 - 12.5	16	100	90	0.5	1.1	70	0.15
17170	9.84 - 15.0	17	120	75	0.3	1.1	55	0.11
18170	11.9 - 18.0	18	140	62	0.3	1.1	50	0.08
19170	14.5 - 22.0	19	180	51	0.3	1.1	43	0.06
20170	17.6 - 26.7	20	220	42	0.3	1.1	32	0.03
21170	21.7 - 33.0	21	260	34	0.2	1.1	30	0.02
22170	26.4 - 40.1	22	320	28	0.2	1.1	25.5	0.02

23170	33.0 - 50.1	23	400 22	Specifications available on request
24170	39.3 - 59.7	24	500 19	
25170	49.9 - 75.8	25	620 15	
26170	60.5 - 92.0	26	740 12	
27170	73.8 - 112	27	900 10	

Higher frequencies are available on request.

