




Electrical

Impedance	50 ohm
Frequency Range	26.3-40 GHz
VSWR	1.2 max
Input Avg Power	1000 Watts @ 25°C
Peak Power	10k Watts
Operating Temperature	-40°C~+70 °C

Mechanical

Waveguide Size	WR28(R320)
Flange Type	UG599/U
Waveguide Material	Aluminum
Waveguide Finish	Painted
Heat Sink Material	Aluminum
Heat Sink Finish	Painted

Dimensions mm[inch]

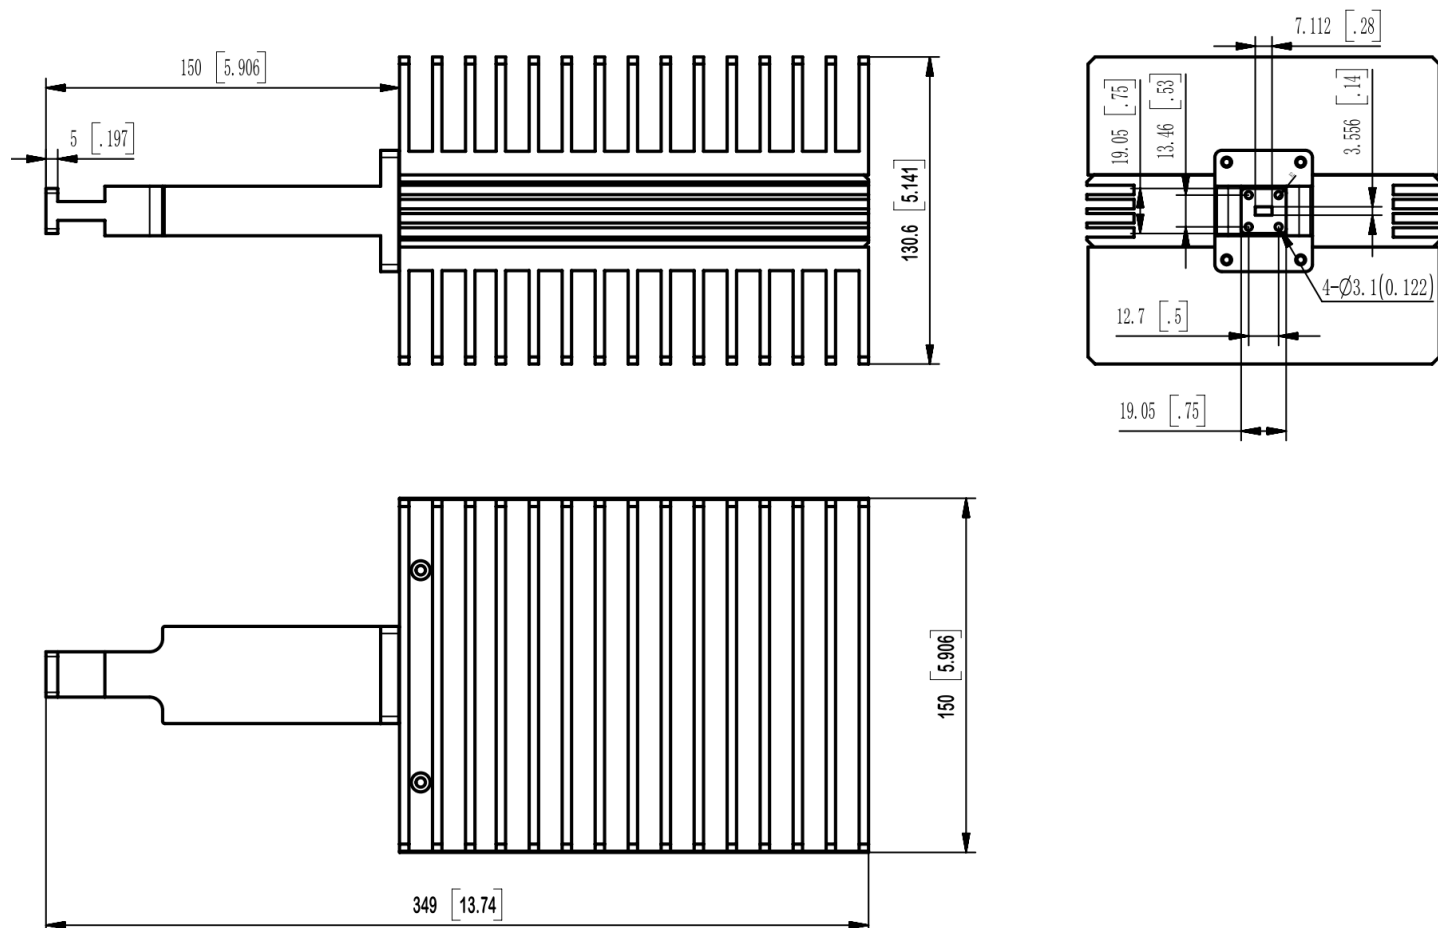



Typical Test Data

