Waveguide Termination

WT510A

WR510, 1.45-2.2 GHz, 25 Watts, Rectangular Cover Flange

Rev 1

Electrical

Impedance	50 ohm
Frequency Range	1.45-2.2 GHz
VSWR	1.03 max
Input Avg Power	25 Watts @ 25℃
Operating Temperature	-40℃~+70℃

Mechanical

Waveguide Size	WR510(R18)
Flange Type	IEC: UDR18
Waveguide Material	Aluminum
Waveguide Finish	Grey painted
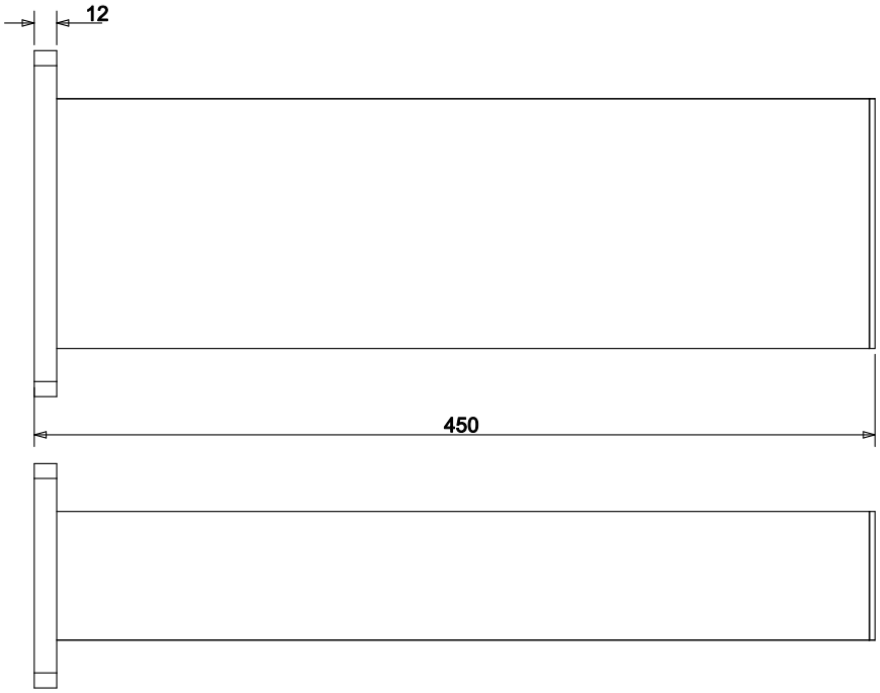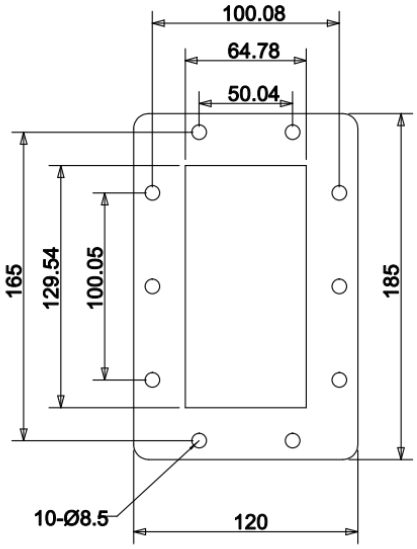
Dimensions(mm)