

Waveguide to Coaxial Adapter AWR75NR

WR75 to N Female, Rectangular Cover Flange, Right Angle



Rev 1

Electrical

Frequency Range	9.84-15 GHz
VSWR	1.2 max

Configuration

Waveguide Size	IEC	R120
	EIA	WR75
Flange Type	IEC	UDR120
Coax Connector	N Female	
Body Geometry	Right Angle	


Materials

Waveguide Body	Aluminum, black or grey painted
Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper

Mechanical & Environmental

Operating Temp	-40℃ to 70℃
Connector Interface	MIL-STD-348
RoHS	Compliant

Typical Test Data

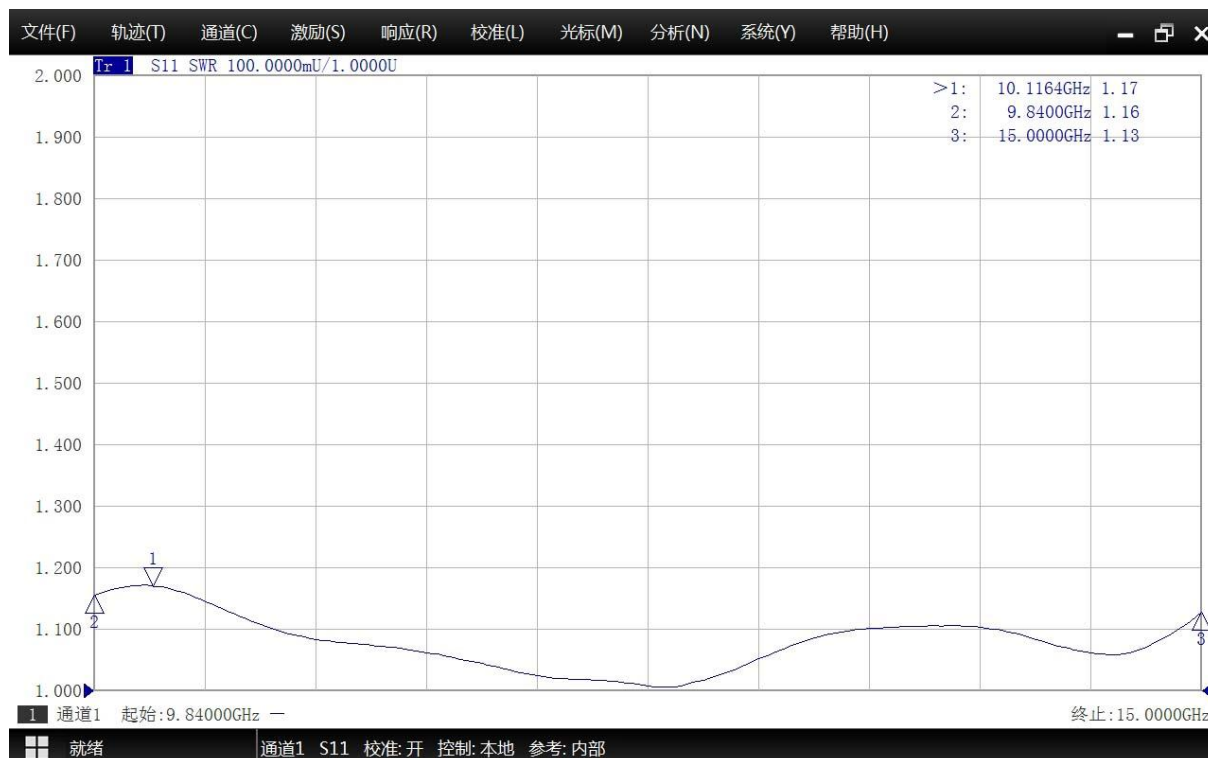

Waveguide to Coaxial Adapter AWR75NR

WR75 to N Female, Rectangular Cover Flange, Right Angle



Rev 1

Dimensions(mm)

