

Waveguide Termination

WT42A



WR42, 17.6-26.7 GHz, 0.5 Watts, Square Cover Flange

Rev 2




Electrical

Impedance	50 ohm
Frequency Range	17.6-26.7 GHz
VSWR	1.05 max
Input Avg Power	0.5 Watts @ 25°C
Operating Temperature	-40°C ~ +70°C

Mechanical

Waveguide Size	WR42(R220)
Flange Type	IEC: UBR220
Waveguide Material	Copper
Waveguide Finish	Grey painted

Dimensions(mm)

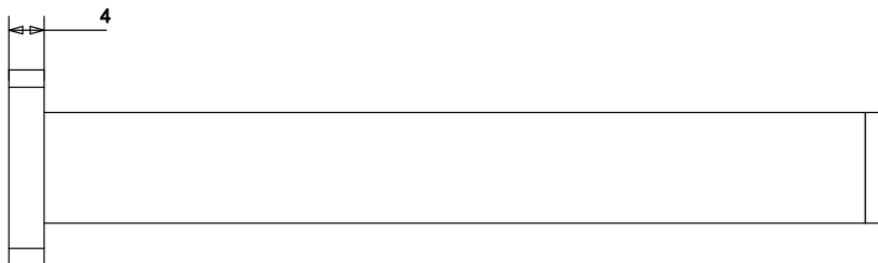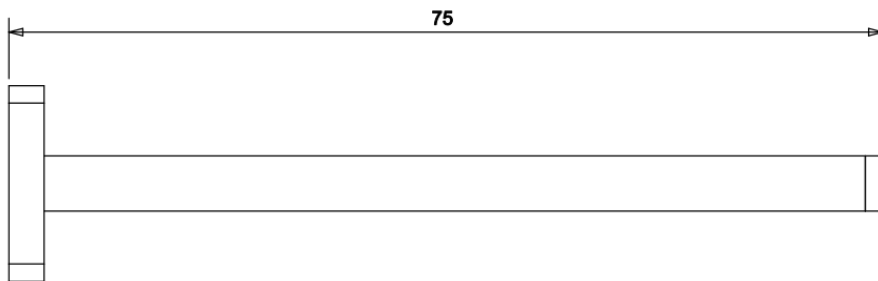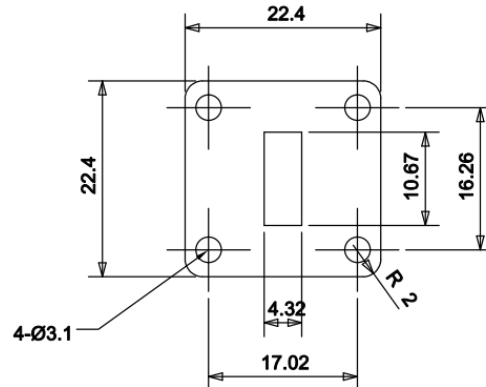



Typical Test Data

