


4-Channel equal Power Splitter

DESCRIPTION

- Compact 4-channel resistive power combiner.
- Covers the frequency range from 0 – 1000 MHz.
- Almost no ripple in loss over the entire frequency range.

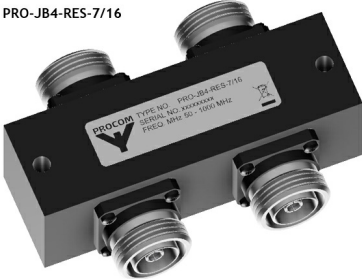

ORDERING

Model	Product No.
PRO-JB4-RES-N(f)	210000421
PRO-JB4-RES-7/16(f)	210000420


SPECIFICATIONS

Electrical	
Model	PRO-JB4-RES-...
Frequency	0 - 1000 MHz
Max. Input Power	10 W
Impedance	50 Ω
Input VSWR	< 1.5:1
Insertion Loss and Isolation	Typ. 10.3 dB +/-1 dB
No. of Channels	2
Mechanical	
Connection(s)	N female or 7/16 female
Dimensions	124 x 77 x 40 mm
Weight	0.45 kg / 0.99 lb
Environmental	
Operating Temperature Range	-30°C to +60°C


ADDITIONAL DATA

MOUNTING DETAILS

PRO-JB4-RES-N

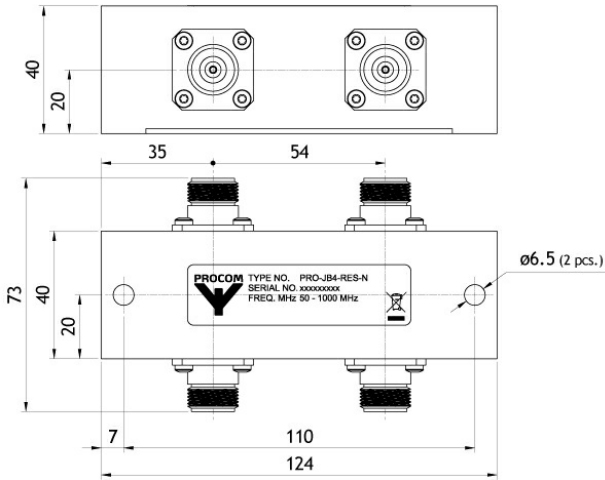

TYPICAL RESPONSE CURVE

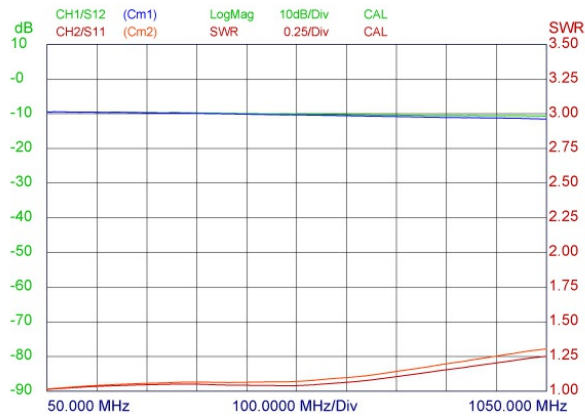

PRO-JB4-RES-7/16

