# TQJ-150A3F25 Fiberglass Omni Antenna

- TQJ-150A3F25 Omni Antenna is Specially designed for VHF Band network
- With N Female Connector
- All White design
- 134～174MHz VHF Band

| Specifications | |
|---|---|
| Model | TQJ-150A3F25 |
| **VHF Omni Antenna** | |
| Freq. Range-MHz | 134 to 174 |
| Gain-dBi | 3.2 |
| Vertical Beam width in degree-° | 66±15 |
| H-plane 3-Db bandwidth | Omni-directional |
| VSWR | ≤1.5 |
| Nominal impedance-Ω | 50 |
| Polarization | Vertical |
| Max. Power-W | 200 |
| Connector type | N Female |
| **Mechanical specifications** | |
| Length-mm | 1410±20 |
| Diameter-mm | ф28（Max） |
| Mounting way | Mast |
| Mast Diameter-mm | Φ40~φ50 |
| Radome Colour | White |
| Operating Temperature | -50℃ to +75℃ |
| Humidity | 95%@25℃ |
| Weight-Kg | 0.55(exclude the bracket) |
| Maximum wind speed-m/s | 60 |
| Operating wind speed-m/s | 50 |

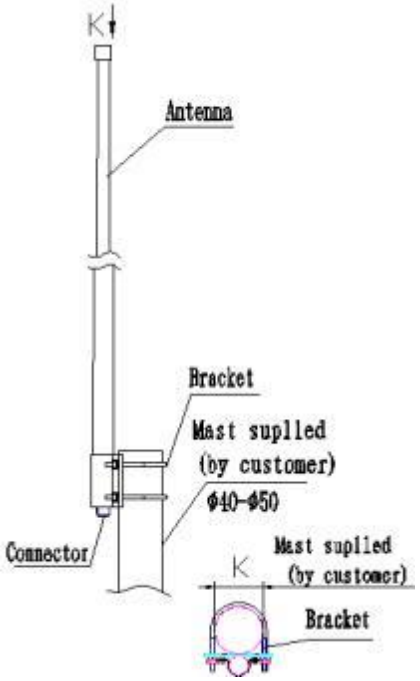


KBT
Add：No.30 Dongyang 3rd Road, Danzao Town, Nanhai District, Foshan City, Guangdong, China 528216
Tel: +86-757-88022860 Email: kbt@kenbotong.com Web: http://www.kenbotong.com