
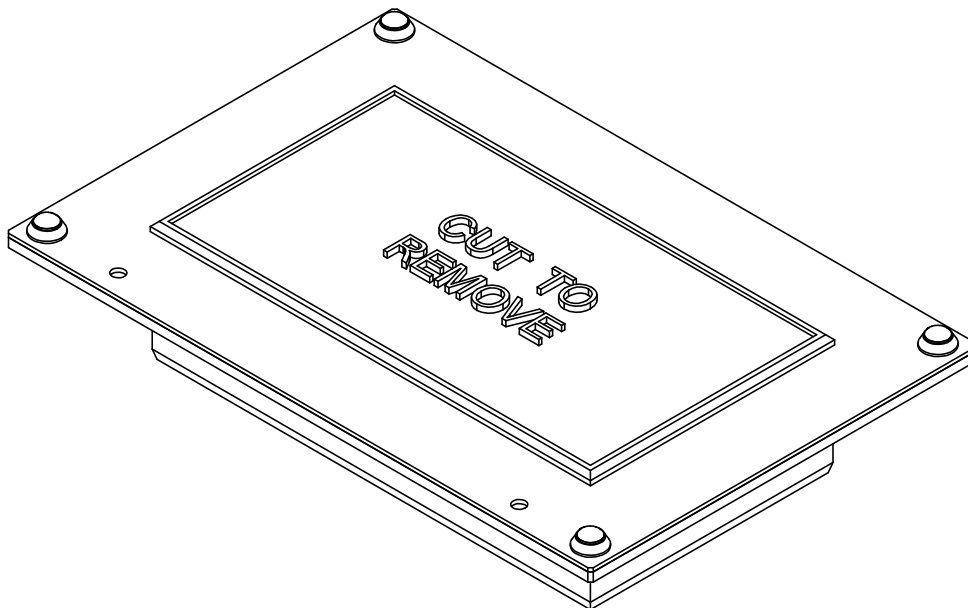


PRODUCT DATA SHEET

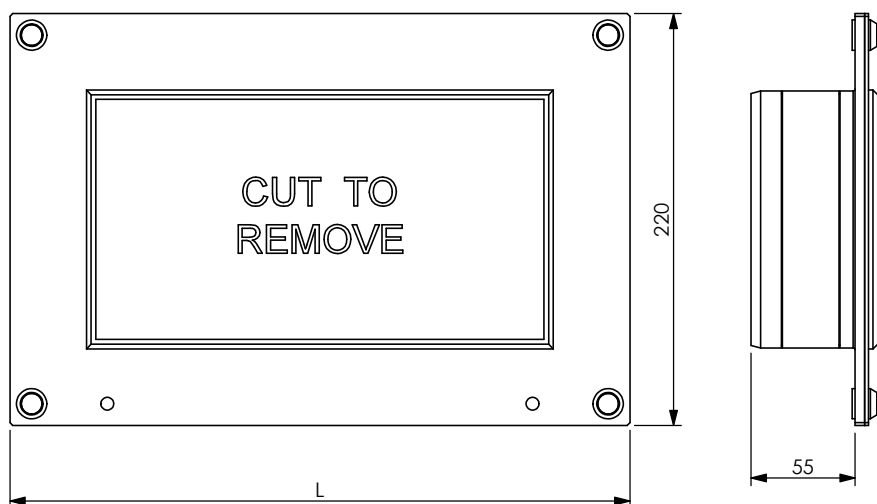

MATERIAL	
Frame and Collar	AISI 304 Stainless Steel
Gasket	Black EPDM UV Resistant

CODE	ARTICLE	HOLE MEASURES	FRAME Lx220	WALL OPENING Dimensions Referred to Frame's external size	BOX	WEIGHT
61 1511 1400	PMR 140/01	140x120	240x220	160x140	1	870
61 1511 2300	PMR 230/02	230x120	330x220	250x140	1	1350
61 1511 2800	PMR 280/03	280x120	380x220	300x140	1	1700
61 1511 3300	PMR 330/04	330x120	430x220	350x140	1	1900

RI	DATE	DR	DATE	AP	Description: PMR - Empty Frames PMR - Basic Built-in Frame Empty, closed by removable membrane The rectangular built-in Frame, is joined to an EPDM rubber gasket, temporarily closed by a removable sheet. Its window is suitable to house rectangular GPR cushions with round passages of different diameters. Round GRR and GRE reductions with GTR round plugs, fit in the passages. The GPE mechanical expander efforts the final tightening of the system.
02					
01					
00	29/01/16	G.S.	29/01/16	A.V.	
1 ST EMISSION					
 Setting Installation Standards					

FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress
Copyright FI.MO.TEC. S.p.a. All rights reserved.