


## Coaxial Cable Connector 24\_MMCX-50-2-1/111\_O

### Description

Straight bulkhead cable feed through

Interface standards  
SUHNER-MMCX

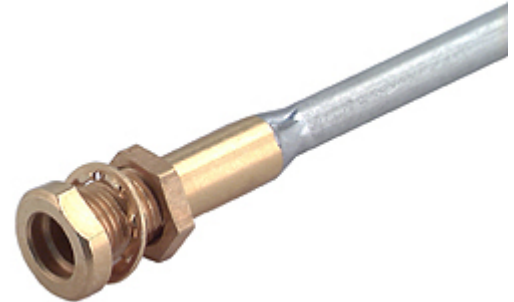

### Technical Data

#### Electrical Data

|                          |       |
|--------------------------|-------|
| Impedance                | 50 Ω  |
| Interface frequency max. | 6 GHz |

#### Mechanical Data

|                |           |
|----------------|-----------|
| Centre contact | crimped   |
| Outer contact  | soldered  |
| Weight         | 0.0009 kg |

#### Environmental Data

|                                                      |                  |
|------------------------------------------------------|------------------|
| Operating temperature                                | -55 °C to 155 °C |
| 2011/65/EU (RoHS - including 2015/863 and 2017/2102) | compliant        |

#### Material Data

| Piece Parts    | Material               | Surface Plating                            |
|----------------|------------------------|--------------------------------------------|
| Centre contact | Copper Beryllium Alloy | Gold Plating (Nickel underplated)          |
| Outer contact  | Brass                  | Gold Plating (without Nickel underplating) |
| Body           | Brass                  | Gold Plating (without Nickel underplating) |
| Insulator      | PFA / PTFE             |                                            |
| Fastening nut  | Brass                  | Gold Plating (without Nickel underplating) |
| Washer         | Bronze                 | Gold Plating (without Nickel underplating) |

### Related Documents

|                      |                |
|----------------------|----------------|
| Outline drawing      | DOU-00009970   |
| Catalogue drawing    | DCA-00009291   |
| Assembly instruction | DOC-0000180170 |
| Mounting hole        | DOU-00009144   |

### Ordering Information

|                |                       |
|----------------|-----------------------|
| Single package | 24_MMCX-50-2-1/111_OE |
|----------------|-----------------------|

### Additional Information

|                 |              |
|-----------------|--------------|
| Suitable cables | EZ_86_TP_M17 |
|-----------------|--------------|