# PRODUCT DATA SHEET

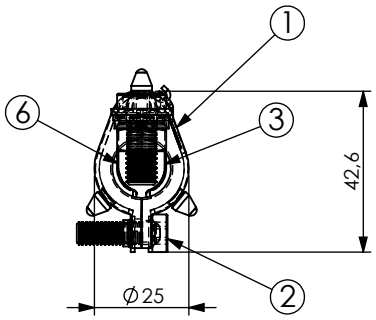


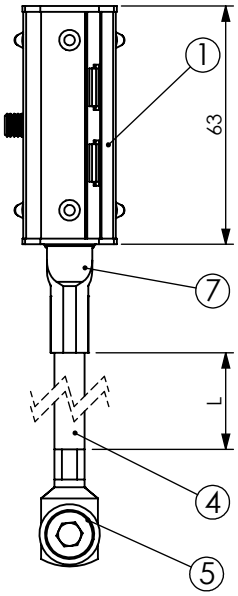




***A) SPECIFICATIONS***

***1*** *Shell: Stainless steel.*
***2*** *Hexagon socket head Screw: Stainless steel VCI 6x20*
***3*** *Gasket: Rubber EPDM.*
***4*** *16sqmm Connection cable: L=500 PE rigid copper cable.*
***5*** *Cable lug Ø8: Tinned copper. Including earthing screw kit (screw VCI 8x20; nut DAI 8, washers REG 8 + RPI 8/16).*
***6*** *Inner Contact: Tinned brass.*
***7*** *Contact bar: Tinned brass.*

***B) RESISTANCE TESTS***

***Waterproof test:***
*IP 68 (FIMO Test according to IEC60529 normative).*
***Contact Resistance </= 1mOhm***
***Operating Temperature -40°C +85°C***

***C) PACKAGING INFORMATION***

*Packing in boxes.*
*Label indicating:*
*product code, article, quantity, production batch,*
*FIMO logo and figure.*
*( Customer code on request ).*

***D) MOUNTING INSTRUCTIONS***

*IST 046*

| code | **6115409012** |
|---|---|
| article | **KMT 1/2" P E** |

| D | L | | |
|---|---|---|---|
| 16-17 | 500 | 10 | 0.2421kg |

| RI | DATE | DR | DATE | AP |
|---|---|---|---|---|
| 02 | | | | |
| 01 | | | | |
| 00 | 17/12/2014 | E.B. | 17/12/2014 | A.V. |
| | 1ST EMISSION | | | |

*Description:*
*Grounding Kit*

FIMO Setting Installation Standards

RoHS compliant. RoHS 2002/95/EC

*Use:* *Earthing of coaxial cables.*

FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress
Copyright FI.MO.TEC. S.p.a. All rights reserved.