Indoor, Ceiling Mount Omni-Directional Antenna, Ultra-Broad, Multi Band Performance

DESCRIPTION

- Indoor, Ceiling Mount Omni-Directional Antenna
- Ultra-Broad, Multi Band Performance



ORDERING


Model	Product No.
Antenna with N-Type Connector	5056000
Antenna with 4.1/9.5 Mini-DIN Connector	5056000-mDIN
Antenna with 7/16-DIN Connector	5056000-DIN

SPECIFICATIONS


Electrical	
Frequency	380-960 MHz and 1710-6000 MHz
Max. Input Power	50 W
Polarisation	Vertical
3 dB Beamwidth, H-Plane	360 °
Gain	2.1dBi (330-960 MHz), 5dBi (1710-6000 MHz)
VSWR	<2.8:1 (330-350MHz), <2:1 (350-6000MHz)
Passive Intermodulation	< -143 dBc
In iBwave	Yes

Mechanical	
Connection(s)	N-Type Female, 4.1/9.5 Mini-DIN Female or 7/16 DIN Female on Base of Antenna
Dimensions	334 x 232 mm (13.1 x 9.1 in)
Weight	0.5 kg / 1.10 lb
Mounting	Ceiling Mount kit included

ADDITIONAL DATA

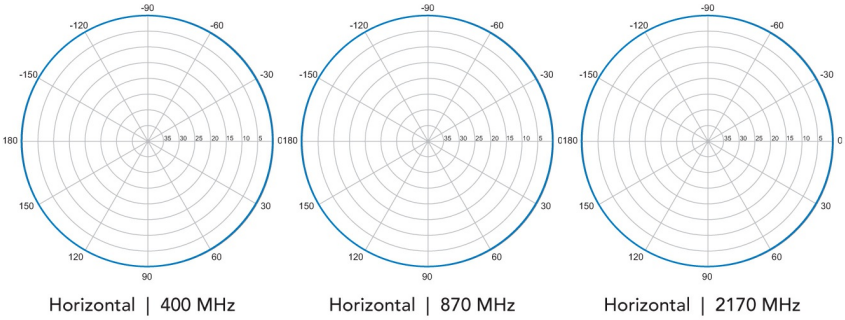

Horizontal | 400 MHz | Horizontal | 870 MHz | Horizontal | 2170 MHz

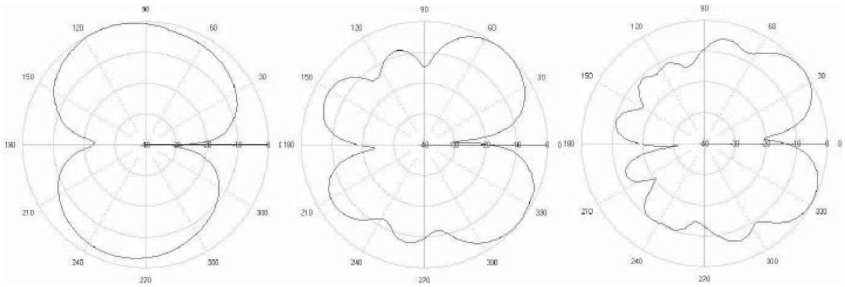

Vertical | 400 MHz | Vertical | 870 MHz | Vertical | 2170 MHz

