

10-Cavity Duplexer for the 160 MHz Band

DESCRIPTION

- The DPF 2/55... is a 10-cavity duplex filter for duplex radio transceivers.
- This duplexer is delivered in a low band version type DPF 2/55 L, tunable within 138 - 156 MHz and a high band version type DPF 2/55 H, tunable within 152 - 175 MHz. These models are again delivered in submodels, each dedicated to work with a certain TX-RX spacing. See "Ordering information" below.
- The DPF 2/55... models are primarily intended for equipment, where the TX and RX operate on several channels, i.e. within a certain port bandwidth. In the last case, factory-tuning is recommended.
- The filter has very small physical dimensions owing to the use of high-Q, temperature compensated helical resonators.
- The housing is made of extruded aluminium, the chassis of passivated steel, and teflon insulation has been applied in the rigid coaxial cables and in the connectors.
- The filter is black vinyl-coated to prevent corrosion.



ORDERING

Model	Product No.	Description	Frequency
DPF 2/55 L-4/6-N	200002385	SPACING: 4 - 6 MHz	138 - 156 MHz
DPF 2/55 L-6/8-N	200002386	SPACING: 6 - 8 MHz	138 - 156 MHz
DPF 2/55 L-8/10-N	200002387	SPACING: 8 - 10 MHz	138 - 156 MHz
DPF 2/55 H-4/6-N	200002388	SPACING: 4 - 6 MHz	152 - 175 MHz
DPF 2/55 H-6/8-N	200002389	SPACING: 6 - 8 MHz	152 - 175 MHz
DPF 2/55 H-8/10-N	200002390	SPACING: 8 - 10 MHz	152 - 175 MHz

SPECIFICATIONS

Electrical	
Model	DPF 2/55...
Frequency	DPF 2/55 L : 138 - 156 MHz DPF 2/55 H : 152 - 175 MHz
Max. Input Power	50 W
Insertion Loss Tx-Ant and Ant-Rx	Multi-channel tuned, 3 MHz BW: < 1.6 dB Multi-channel tuned, 8 MHz BW: < 1.6 dB
Tx-Rx Spacing	4 - 10 MHz (adjustable)
Tx-Noise Suppression on Rx-Frequency	Multi-channel tuned, 3 MHz BW: > 85 dB (typ. 90 dB) Multi-channel tuned, 8 MHz BW: > 70 dB
Rx-Isolation on Tx-Frequency	Multi-channel tuned, 3 MHz BW: > 85 dB (typ. 90 dB) Multi-channel tuned, 8 MHz BW: > 70 dB
Impedance	50 Ω
VSWR	< 1.5:1

Mechanical	
Connection(s)	N female, BNC(f), TNC(f), UHF(f), SMA(f) on request
Dimensions	232 x 130 x 58 mm / 9.13 x 5.12 x 2.28 in.
Weight	Approx.1.325 kg / 2.92 lb.

Environmental	
Operating Temperature Range	-30°C to +60°C
Frequency Stability	5 ppm/° C (approx.)


ADDITIONAL DATA

TYPICAL RESPONSE CURVES @ 4 MHZ TX-RX SPACING & 3 MHZ BW

□

TYPICAL RESPONSE CURVES @ 4 MHZ TX-RX SPACING & 8 MHZ BW

□

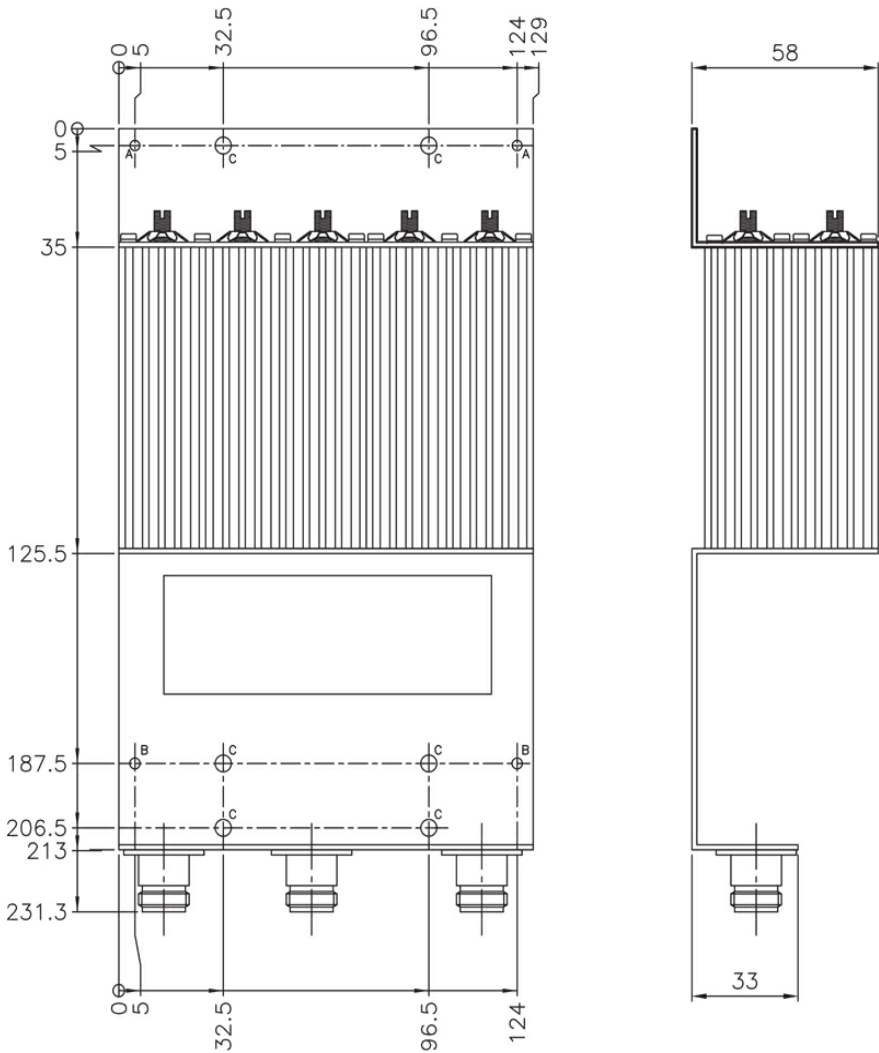

Mounting holes:

- A: ø3.0 mm (2 pcs)
- B: ø3.2 mm (2 pcs)
- C: ø5.0 mm (6 pcs)

ORDERING INFORMATION

When ordering, please use the table above to select the appropriate ordering designation for the desired filter type. If duplex TX and RX frequencies are stated when ordering, the duplexers are delivered factory adjusted. If TX and RX frequencies are not stated, the filters are delivered non-adjusted.

Special configurations of this filter type may be quoted on request. For instance, the filter can be delivered with other connector types or with flying leads (RG 316 coaxial cable) terminated with connectors or for soldering-connection.

