

# TQJ-2400AT

## 2.4GHz Fiberglass Omni Antenna

### Technical Sheet



#### Applications

- 2.4 GHz Wireless LAN
- 2.4GHz ISM Band
- Public Wireless Hotspot
- Multipoint Applications


#### Features

- Superior performance
- High Gain, Low VSWR
- Light weight fiberglass radome
- All weather operation
- Heavy-duty steel mounting brackets

#### Specifications

|                      |                    |
|----------------------|--------------------|
| Model                | TQJ-2400AT         |
| Freq. Range-MHz      | 2400~2483          |
| Bandwidth-MHz        | 83                 |
| Gain-dBi             | 12                 |
| Vertical Beamwidth-° | 7                  |
| VSWR                 | ≤1.5               |
| Impedance-Ω          | 50                 |
| Polarization         | Vertical           |
| Max. Power-W         | 100                |
| Connector Type       | N-Male or N-Female |
| Dimension-m          | 1.2                |
| Weight-Kg            | 0.8±0.2            |
| Pole Diameter-mm     | Φ40~50             |

#### Installation

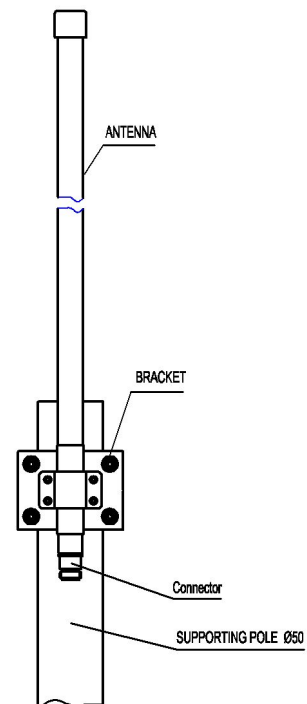

Kenbotong Technology Co., Ltd.

Addr :NO.2 Chanxiu Road ,Foshan city,Guangdong China Code:528061  
 Tel: 86(757)8202-5597, 8221-9788 Fax : 86(757)8221-2072,8802-2808  
 Email: kbt@kenbotong.com web: <http://www.kenbotong.com>