


RMC 158 "A" Series

PRODUCT DESCRIPTION

RMC 158-HLFR "A" Series

Reference suffix ⁽¹⁾ : -HLFR

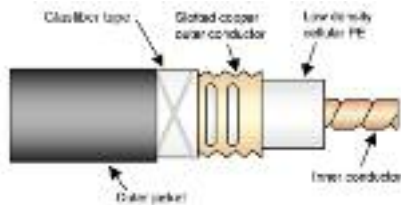

Fire behaviour

Halogen free and flame retardant outer sheath, Low corrosive gas emission acc. to IEC 60754-2
Flame retardant acc. to IEC 60332-1 and IEC 60332-3 cat. C, Low smoke emission acc. to IEC 61034

Slots in the copper outer conductor allow a controlled portion of the internal RF energy to be radiated into the surrounding environment. Conversely, a signal transmitted near the cable will couple into the slots and be carried along the cable length.

FEATURES and BENEFITS

- From 30 MHz to 3.5 GHz with resonant frequencies
- Robust Cable, with low bending radius
- Main Applications: Tunnel - GSM, DCS-1800, UMTS, WLAN, LTE

TECHNICAL FEATURES

• Size		1-5/8"
• Frequency Range	MHz	30 - 3500
• Recommended for Frequency	MHz	400, 450, 900, 1800, 2200, 2400 and 2700
• Cable Type		RMC (Radiated Mode Cable)
• Jacket		HLFR (Halogen Free Low Smoke Flame Retardant)
• Slot Design		Groups of Slots at short intervals
• Impedance	Ω	50 +/- 2
• Velocity Ratio	%	89
• Capacitance	pF/m	75
• Inner Conductor dc Resistance	$\Omega/1000\text{ m } (\Omega/1000\text{ ft})$	1.44 (0.44)
• Outer Conductor dc Resistance	$\Omega/1000\text{ m } (\Omega/1000\text{ ft})$	1.28 (0.39)
• Inner Conductor Material		Corrugated copper tube
• Dielectric Material		Cellular polyethylene
• Outer Conductor Material		Overlapping corrugated copper foil with slot groups